



# ELKO BIS

SYSTEMY ODGROMOWE



[www.elkobis.com.pl](http://www.elkobis.com.pl)


## Insulated High Voltage Cable

**Cat. no.**  
30000199

**Type**  
300.1

**Material**  
Other

To discharge strike electric stream. Use at places where appropriate insulation distance from protected elements can not be kept or close to communication channels. Copper (30000199) or Aluminium (30000299) core conductors. Copper provides 75 cm, Aluminium 95 cm separation distance. Can be directly lead on electric devices. Resistant to weather conditions.

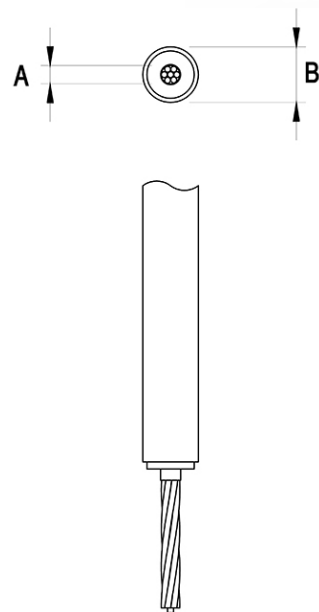

TYP	A	B	Wire core material	Air separation distance
300.1	35 mm <sup>2</sup>	23 mm	copper	75 cm




## Insulated High Voltage Cable

**Cat. no.**  
30000299

**Type**  
300.2

**Material**  
Other

To discharge strike electric stream. Use at places where appropriate insulation distance from protected elements can not be kept or close to communication channels. Copper (30000199) or Aluminium (30000299) core conductors. Copper provides 75 cm, Aluminium 95 cm separation distance. Can be directly lead on electric devices. Resistant to weather conditions.



TYP	A	B	Wire core material	Air separation distance
300.2	50 mm <sup>2</sup>	25 mm	aluminium	95 cm

